


CABLE CAPACITIES CHART

Man-Rider Air Hoists

Full Drum Capacity in Measured Feet

OFFSHORE MODEL (Personnel Capacity)		1/2"	5/8"	3/4"
FA 2 MR	2,500 lbs.	492'		
FA 2.5 MR	3,125 lbs.	717'	497'	
FA 5 MR	6,250 lbs.		1160'	663'

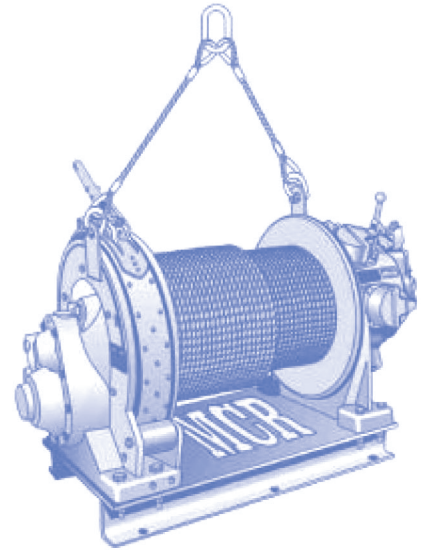

Ingersoll-Rand Air Hoists

Full Drum Capacity in Measured Feet

MODEL	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1 1/8"	1 1/4"
BU7A (1K)	450	245	140								
HU (2.5K)		1,313	829	686	379						
HUL (2.5K)		2,773	1,744	1,445	813						
H5U (4K)		1,313	829	686	379						
H5UL (4K)		2,773	1,744	1,445	813						
HU40 (4K)		1,313	829	686	379						
HUL40 (4K)		2,773	1,744	1,445	813						
K4U (6K)			1,657	1,223	713	457	300				
K4UL (6K)			3,368	2,494	1,427	913	600				
K5U (6K)				1,223	713	457	300				
K5UL (6K)				2,494	1,427	913	600				
K6 (10K)				1,862	1,070	716	535	373	256		
K6UL (10K)				3,784	2,186	1,436	1,070	775	535		
K6UL36 (10K)				8,497	5,706	3,303	2,119	1,583	1,159	815	
POPEYE (20K)					8,658	6,700	4,000	3,026	2,340	1,597	1,488
IR FA101 (22K)					10,637	7,158	4,699	3,319	2,627	2,070	
RAM AW3 (22K)					11,092	7,079	4,735	3,408	2,742	2,197	
RAM AW4 (28K)					13,028	7,792	5,756	4,216	3,016	2,415	

